


# BT2-DL

## Bolt Tension Monitor

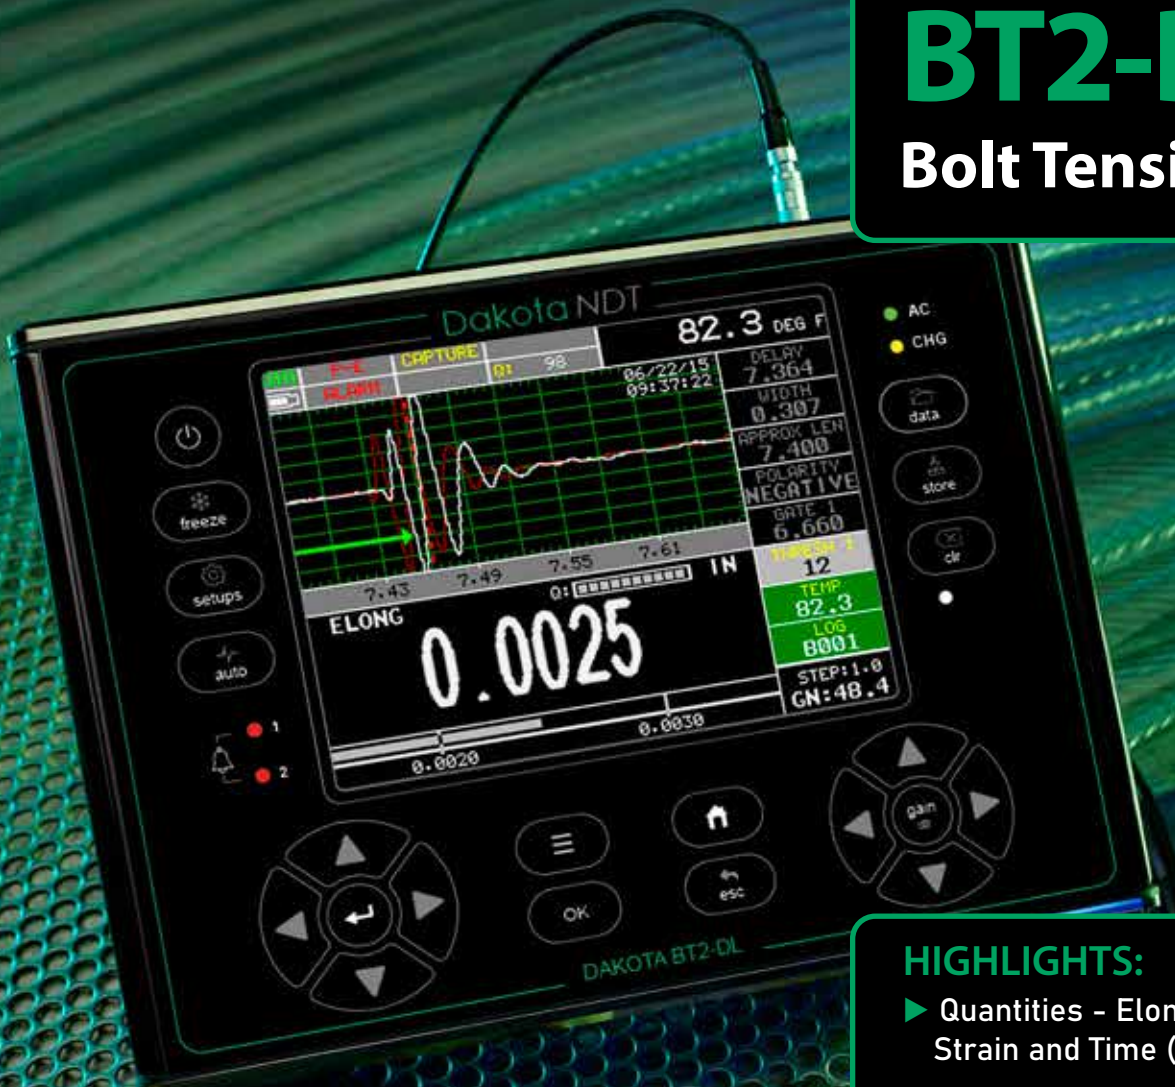

### HIGHLIGHTS:

- ▶ Quantities - Elongation, Load, Stress, Strain and Time (nanoseconds).
- ▶ Measure Modes - Pulse-Echo, Echo Echo, Echo-Echo-Verify (triple echo).
- ▶ Auto Correlation - Transducer Placement.
- ▶ Custom auto calibration feature.
- ▶ 4GB internal & up to 64GB external memory.
- ▶ USB 1.1 connectivity.
- ▶ Analog, serial & alarm outputs.
- ▶ PC & OSX reporting software.
- ▶ Import & export files - between BT2-DL and BT1-DL

# DAKOTA BT2-DL BOLT TENSION MONITOR

The Dakota BT2-DL Ultrasonic Bolt Tension Monitor offers powerful features, faster operation, and the ability to handle a wider range of bolt lengths. In Pulse-Echo (PE) mode, it excels at measuring uncoated fasteners up to 100 feet. For smaller fasteners where coating thickness might be a concern, Echo-Echo (EE) mode offers accurate measurement up to 4 inches in length.

Industries: Aerospace, Automotive, Energy, Infrastructure, Mining, Oil & Gas, Railway

## SPECIFICATIONS

### PHYSICAL

**Weight:** 4.5lbs (2.04kgs), with batteries.

**Size:** 8.5W x 6.5H x 2.5D in  
(216 x 165 x 70mm).

**Operating Temperature:**  
14 to 140F (-10C to 60C).

**Case:** Extruded aluminum body with nickel plated aluminum end caps (gasket sealed).

**Keypad:** Membrane switch with 21 tactile keys.

**Display Views:** RF (full wave view), +/- Rectified (half wave view), Digits, or split screen combination (wave plus large digits).

**Environmental:** Meets IP65 requirements.

### CONNECTIONS

**USB:** Direct USB 1.1 PC connectivity. Windows & OSX interface software.

**Power Connector:** 12v @ 2amps, adapter 100-240 VAC, .7 Amps, 50-60 Hz.

**5 Pin Lemo (includes):**

**RS232Output** - RS232 PC serial interface.

**Alarm Outputs** - Two independent alarm outputs triggered by the gates.

**Analog Out** - Proportional outputs (amplitude or distance), 0-10 volts.

**Transducer Connectors:** Two LEMO 00 connectors.

### MEMORY

**Log Formats:** Grid (Alpha Numeric).

**Capacity:** 4Gb internal & up to 64Gb external memory.

**Screen Capture:** Tagged interface file (.tif) capture for quick documentation.

**Custom Setups:** 64 user configurations.

### CERTIFICATION

Factory calibration traceable to NIST & MILSTD- 45662A.

### WARRANTY

2 year limited

### REPLACEMENT

BT2-DL replaces Max II

### POWER SOURCE

**Lithium Ion Pack:** 10.8v, 2 amp hrs, typical operation 18hrs.

**Battery Backup:** Emergency battery backup. Six 1.5V alkaline, 1.2V AA Nicad cells, 1.2V AA NI-MH, or other other equivalent power source. Battery life (continuous use): Alkaline (12 hrs), Nicad (5hrs), and NI-MH (12hrs), with default settings.

### ELECTRONICS

**Display:** Blanview sunlight readable QVGA TFT color display (320 x 240 pixels). Viewable area 4.54 x 3.40 in (115.2 x 86.4 mm), or 5.7 in (144.78 mm) diagonal. 16 color pallette, multiple color options and variable brightness.

**Screen Refresh Rate:** 60Hz.

**Timing:** Precision TCXO timing with single shot 100 MHz 8 bit ultra low power digitizer.

**Pulsar Types:** Spike, Square Wave & Tone Burst.

**Pulsar Voltage:** 100 - 400v.

**Pulse Width:** Selectable step options Spike, Thin, Wide, HV Spike, HV Thin, HV Wide, TB .5MHz, TB 1MHz, TB 2MHz, TB 5MHz, TB 10MHz. Spike 40 ns, Square Wave 80 to 400 ns, Tone Burst 50 ns to 1 microsecond.

**Gain:** 0 to 110dB with 0.2dB resolution. Manual and AGC control.

**Damping:** 50, 75, 100, 300, 600, & 1500 ohms.

**Frequency Band:** Broadband 1.8 - 19MHz (-3dB) filter.

**Horizontal Linearity:** +/- 0.4% FSW.

**Vertical Linearity:** +/- 1% FSH.

**Amplifier Linearity:** +/- 1 dB.

**Amplitude Measurement:** 0 to 100% FSH, with 1% resolution.

**Delay:** 0 - 999.999in (25,400mm) at steel velocity.

**Measurement Gates:** Three independent gates depending on measurement mode selected, with audible and visual alarms. Amplitude 5-95%, 1% steps.

### FEATURES

**Setups:** 64 custom user defined setups; factory setups can also be edited by the user.

**Auto Set:** Automates the detection, scope, and display setting process for each individual bolt.

**Gates:** Three measurement gates, depending on measurement mode used, with adjustable start and threshold.

**Alarm Limits:** Adjustable Hi/LO tolerances with visual LED's and audible beeper. Hardware alarm outputs (accessory cable required).

**Field Calibration:** Vector or Regression correction curve for increased accuracy using Load & Stress.

### MEASURING

**Units:** English (in), Metric (mm), or Time ( $\mu$ s).

**Velocity:** 0.0492 to .5510 in/ $\mu$ s  
(1250-13995 m/s).

**Measurement Modes:** Pulse-Echo (P-E), Echo-Echo (E-E), or Echo-Echo-Echo (E-EV).

**Measurement Range:** 1 to 999.999in (2540cm) in pulse-echo (P-E) measurement mode. Range will vary using multi-echo modes - dependent on material type and consistency.

**Detection:** Zero Crossing.

**Resolution:** +/- 0.00001 in (0.0001mm).

**Calibration:** Automatic, Fixed, Single or Two- Point zero calibration options.

**Quantities:**

**Time** - Nanoseconds.

**Elongation** - Change in length (inches/millimeters).

**Load** - Force load applied (pounds KIP or megapascals MPa).

**Stress** - Force for unit area stress applied (inches per inch or millimeters per millimeter).

**%Strain** - Ratio of elongation to effective length.

**Bolt Materials:** Select types from a preset or custom list.



MADE IN THE USA

Dakota NDT  
an Elcometer company