


Dakota CMX10-DL

FULL WAVE CAPTURE THICKNESS GAUGE

Dakota NDT
an Elcometer company

Corrosion and Precision
Thickness Gauge with all new
features included as standard

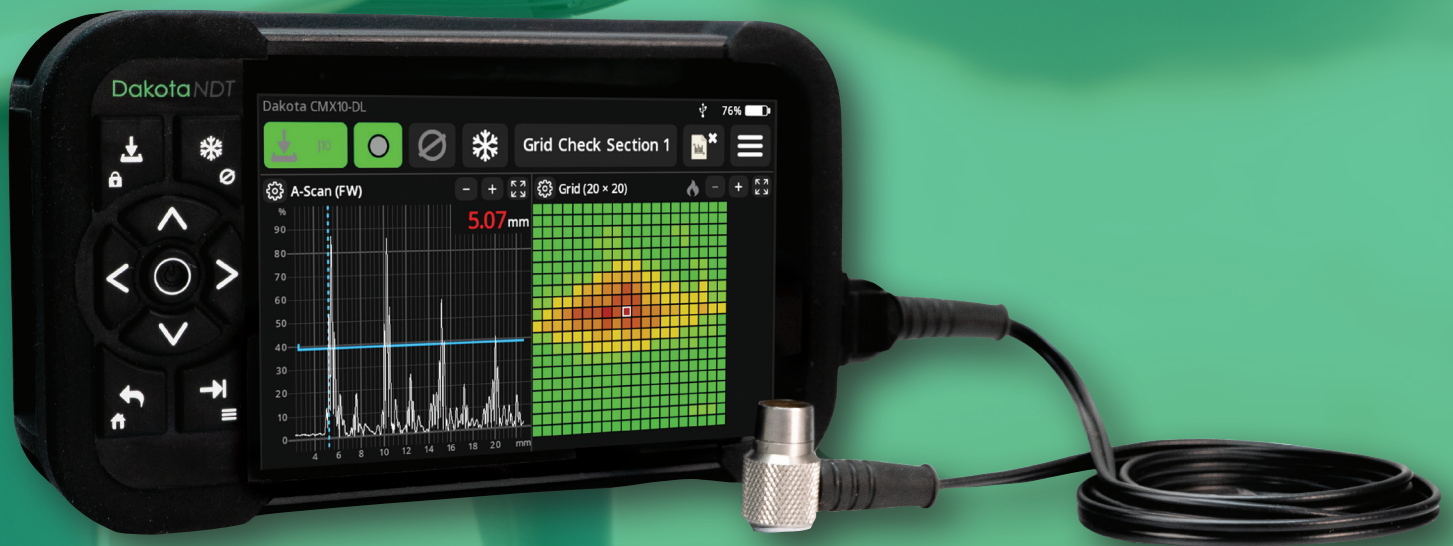

- A- and B- scan recording for easy scan review and depth sizing
- Full traceability, and reassurance of inspection quality
- 2nd layer feature to assess and predict remaining inner liner thickness - Cladding
- Enhanced TCG & BEA, improving detection of porosity, inclusions, and cracks
- Image Collect for repeatable data collection for consistent repeatable part measurement
- FREE DakMaster™ reporting software for fast, simple report creation and sharing
- Mobile DakMaster™ app to capture readings and generate reports instantly in field
- Screen share capability for live demonstration, remote training, and collaboration
- Advanced corrosion tools to highlight complex corrosion types such as pits and cracks
- High precision with delay line probes for accurate measurement of very thin components
- Complex corrosion and thickness measurement with Dual and Single element transducers
- Button and touchscreen supports operation in any environment

Dakota CMX10-DL

FULL WAVE CAPTURE THICKNESS GAUGE

Dakota NDT
an Elcometer company

ULTRASONIC SPECIFICATIONS

Screen Displayed Range	23.3" (592mm) (steel)
Measurement Modes / Range:	Pulse-Echo (P-E): 0.007" to 58.3" (0.18mm to 1480mm) (probe dependant)
	Thru-Paint: Echo-Echo (E-E): 0.007" to 23.3" (0.18mm to 592mm) (probe dependant)
	Thru-Paint Verify: Echo-Echo Verify (E-EV): 0.007" to 11.7" (0.18mm to 296mm) (probe dependant)
	2nd Layer Thickness (PE2): 0.007" to 58.3" (0.18mm to 1480mm) (probe dependant)
	2nd Layer Thickness Thru-Paint (EE2): 0.007" to 23.3" (0.18mm to 592mm) (probe dependant)
Velocity Range	0.0079 to 0.7874 in/ μ s / (200 to 20000 m/sec)
Transmitter Pulse	Square
Transmitter Pulse Voltage (peak-to-peak)	50 - 200V (User Adjustable in 1Volt steps)
Pulse Rise Time	<10 ns
Pulse Duration	25 to 250ns (Dependent on probe frequency)
Gain Control	0-74dB in 0.1dB steps features: Time Controlled Gain, Auto80
Frequency Range	1MHz - 20MHz

PRODUCT FEATURES

Accuracy and Resolution	Resolution: ± 0.0001 " (± 0.001 mm) Accuracy: 0.001" (± 0.01 mm) or $\pm 1\%$ of Reading (whichever is largest) *@ 5MHz $\frac{1}{4}$ " on Steel.
Min & Max Measurement	(Steel @ 5920m/s) Minimum: 0.007" (0.18mm) Maximum: 23.3" (592mm) (Delay: 0.1" - 35" (-3mm - 888mm))
Calibration Options	Zero, 1 Point, 2 Point, Custom Velocity & Preset Material
Gate Modes	Flank, Zero-Cross, Peak
Number Gates	1-3 Depending on Mode Selected
Filter Settings	Low Pass (10Mhz, 20Mhz, 30Mhz), High Pass (0.5Mhz, 2.5Mhz, 5Mhz) and Broadband
Signal Averaging	1-32 samples - Adjustable
Time Corrected Gain (TCG)	Ramp, Curve (up to 16 points)
Pulse Repetition Frequencies (PRFs)	2KHz
Back Wall Echoe Suppression (BEA)	Yes
V-Path Correction	Automatically corrects for V-path (DakotaNDT transducers only)
DakMaster™ Software	PC Software for Reports, Configurations and Back ups Gauge Updates Via DakMaster™
DakMaster™ Mobile App	Record and Report Instantly via Mobile Device

TRANSDUCER

Transducer Types	Dual Contact, Single Contact, Single Delay, Angular (Prove Up)
Auto Detect and Transducer Set Up	Feature compatible with ODU style Transducers

Dakota CMX10-DL

FULL WAVE CAPTURE THICKNESS GAUGE

Dakota *NDT*
an Elcometer company

DISPLAY

Display	800 x 480 pixels, Colour, Touchscreen, Graphical, TFT Display
Display Refresh Rate	60Hz (16ms)
Waveform Refresh Rate	20Hz (50ms)
Display and Recall Facilities	Numerical Reading, A-scan, B-scan and Video Recordings can be stored and retrieved in Data logs
A-Scan	Rectified +/-, RF, Full Wave
B-Scan	Timed Includes Recording and Analysis with 2 Curser Measurement
Differential Mode	Automatically calculates difference from nominal
Display Freeze	Freeze Screen and Overlay Signal on Screen
Expanded Gate	Expand signal displayed under gate
Transducer Stability Indicator	Speed 20Hz (50ms)
Display Colour Inversion	A-Scan Sunlight Assist
Brightness Adjust	Manual and automatic screen brightness level adjustment
5 Selectable Display Configurations	A-Scan, Statistics, Live Reading, Grid, Image Collect
Image Collect Library	Part Display Images (Multiple Formats)
Screen Share and Control	Remote Viewing Feature with Control

MEMORY

Data Output and Storage	USB and Bluetooth® LE Data Output. 128MB Internal Storage, up to 32GB with External Memory Card
Log Formats	Sequential, Grid, Recording, Amplitude/Depth Colour Options
Screen Capture	On Gauge and Screen view function in DakMaster™
Note Ability	OBSTRUCT to indicate inaccessible, with notes
Full Traceability Feature	Set Up Library, Transducer Library, Calibration Library
Data Log File Format Options	Projects, Folders, Individual Files

GAUGE SPECIFICATION

Part Number	CMX10-DL
Operation of Gauge Controls	Keypad Only, Touchscreen Only or Keypad & Touchscreen Combined Control
Gauge Dimensions	7.1 x 4.1 x 2.0" (180 x 105 x 50mm)
Gauge Weight	1.92lbs (872g)
Operating Temperature	14°F to 122°F (-10 to 50°C)
Probe Sockets Type(s)	1/2x Lemo-00 1x ODU Smart Port
Power Supply	LI-Ion - Rechargeable Smart Battery or Mains Power Supply
Battery Life	9 to 15 hrs (Dependent on usage)
Ingress Protection (IP)	Dust tight and protected against low power water jets in any direction; equivalent to IP65
Certification	Designed for EN 15317
Warranty	1 year limited
Manufacture	Made in the United Kingdom
Packing List	Dakota CMX10-DL Gauge, Ultrasonic Couplant; 120ml (4fl oz), Power Supply (UK, EU and US) Adapters, Rechargeable Battery, Hand Strap (x1), Extension straps (x2), Screen Protector x 1, USB Cable, Calibration Certificate, User Guide, DakMaster™ download card, Transit Case

From inspection to professional reports *at the click of a button*



Dakota NDT
an Elcometer company

DakotaNDT.com

E-MAIL: global.sales@DakotaNDT.com

PHONE: +1 831 431-9722

ADDRESS: 1500 Green Hills Road, #107 Scotts Valley, CA 95066

DakotaNDT is an Elcometer Company. DakotaNDT and DakMaster are trademarks of Elcometer Limited. All other trademarks acknowledged. Due to our policy of continuous improvement, we reserve the right to change specifications without notice.

© Elcometer Limited, 2026. All rights reserved. No part of this document may be reproduced, transmitted, stored (in a retrieval system or otherwise), or translated into any language, in any form, or by any means, without the prior written permission of Elcometer Limited.